MPA1 SOLO DANTE














The MPA1 range of audio monitors from TSL Products is trusted by operators and engineers worldwide

The MPA1-SOLO-DANTE provides simultaneous audio monitoring of 64 Dante audio channels and a MADI stream comprising a further 64 channels, with an intuitive interface and easy to use controls.

Built on years of global broadcast audio expertise, the powerful and intuitive MPA1-SOLO-DANTE presents users with instant 'at a glance' monitoring of 64 DANTE/AES67 audio channels as well as 64 MADI channels

The unique 'scroll to hear' function allows users to scroll through and monitor a total of 128 audio channels with ease.

As a member of the MPA1 range of audio monitors, the MPA1-SOLO-DANTE comes complete with a comprehensive web-page and SNMP support, allowing remote configuration and control.

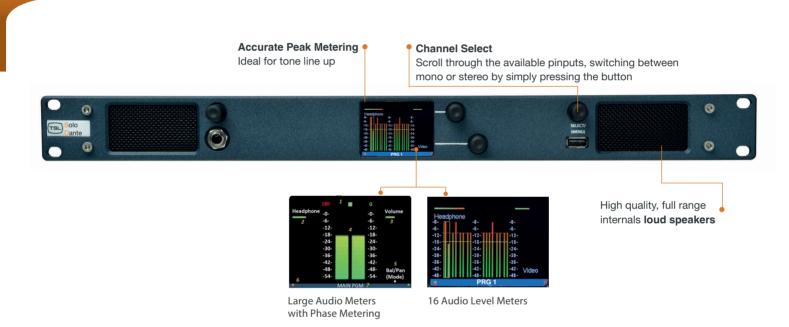

FEATURES



- 1 x 1Gig/E Ethernet Interface for Dante/AES67 Networks
- Simple and Intuitive 'Scroll to hear' monitoring of up to 128 unique audio
 sources
- Front panel display of audio levels, complete with phase metering and source labels
- 1 x MADI Input Coaxial or Optical
- Ethernet connection for monitoring and control via a web browser

- 2 x Line Level Balanced Analogue Outputs for connection to external loudspeakers.
 Fixed or variable settings with -20dB Pad.
- Line level with selectable mute and -20dB.
- 1 x Headphone Output
- SNMP support included.
- Dante Domain Manager compliant

REAR PANEL











NEAN PAINEL











Link/Act 1G







SPECIFICATIONS


HEIGHT	1RU	POWER	85-264V ~ 50/60Hz, 0.75A – 0.5A Max 30W	
DIMENSIONS (L x H x W)	483mm x 45mm x 100mm	UNIT CONTROL	SNMP, Webpage	
WEIGHT	1.4 kg	INPUTS	1 x Dante/AES67 + 1 x MADI Coax + 1 x MADI Optical	
DISPLAY	Audio Metering, Source Labels	OUTPUTS	2 x balanced analogue outputs + 1 x Madi Coax	
AUDIO CHANNELS	16	UPGRADES	Via USB	
SIGNAL TO NOISE RATIO	72dB (+4dBu input level, THD+N A weighted)			
PEAK ACOUSTIC OUTPUT	90dB @ 1foot			
FREQUENCY RESPONSE	40Hz to 20kHz +/- 1dB			

WEBPAGE CONTROL AND MONITORING

LIVE VIEW

L	ive view.	Ro	uting	Names	Configuration	Network Setup
dphones volume	Mute	 6)——		Loudspeakers volume	Muto
Displayed group	Bank 9					
urce	Mute	Solo	Volume		Pan	Level
inte : 1	Mute	Solo	_	•		
inte : 2	Multe	Solo				
inte : 3	Mute	Solo	_0_			
inte : 4	Mute	Solo	_	-		
inte : 5	Muse	Solo	-			
inte : 6	Mute	Solo	_	4		
inte : 7	Mule	Solo	-0-			
inte : 8	Multie	Solo	_	-		

DANTE CONTROLLER



ORDERING INFORMATION

Ordering Code Description

MPA1-SOLO-DANTE Simple 1RU Dante/AES67 and MADI audio monitor: Front panel display with 16 Level Meters, Source Names and Audio Phase

display. 1 x MADI Coaxial + 1 x MADI Optical input and 1 x DANTE Input. 1 x Balanced Stereo Output+ 1 Front Panel Headphone Output, Internal Loudspeakers, Internal PSU, Web-interface and SNMP Control. Dante Domain Manager Compliant.

E. sales@tslproducts.com T. +44 1628 564 610

T. +1 818 898 3380

www.tslproducts.com



